




Thermometers

Various style thermometers used to monitor temperatures in a variety of HVAC/R & Appliance applications


NEW Remote Dial Vapor Tension Thermometers

Features


- Stainless steel housing
- Analog dual scale dial °F or °C
- 48" capillary



S6020BB

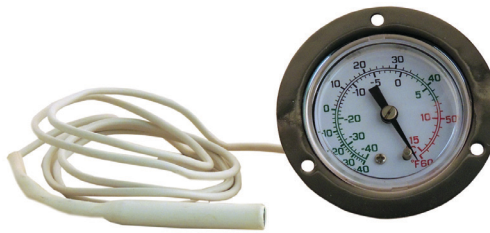

S6020FB

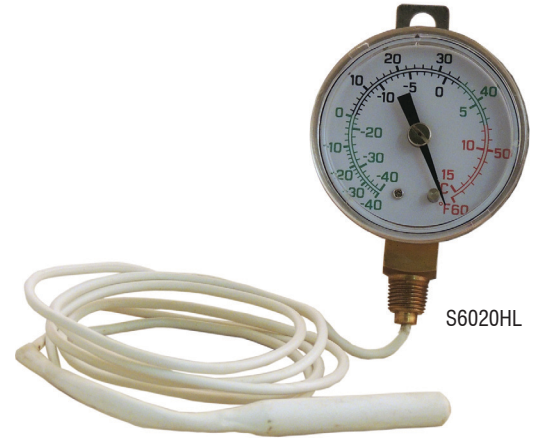

S6020HL

PART NO.	MOUNTING	TEMPERATURE RANGE	DIAL SIZE
S6020BB	Surface back flange/ Back connection	-40°F to 60°F (-40°C to 16°C)	2"
S6020FB	Surface front flange/ Back connection	-40°F to 60°F (-40°C to 16°C)	2"
S6025FB	Surface front flange/ Back connection	-40°F to 60°F (-40°C to 16°C)	2.5"
S6020HL	Surface front flange/ Back connection	-40°F to 60°F (-40°C to 16°C)	2"
S6025HL	Surface front flange/ Back connection	-40°F to 60°F (-40°C to 16°C)	2.5"

NEW Solar Powered LCD Thermometer

Features

- Stainless steel housing
- °F or °C selectable
- Easy to read LCD display
- Temperature update every 10 seconds

PART NO.	
SSDF20	Mounting: Surface front flange / Back connection
	Range: -60°F to 160°F (-51°C to 71°C)
	Accuracy: +/- 2°F
	Dial Size: 2"
	LCD Display Size: 3/8"
	Sensor Length: 60"
	Update Time: 10 seconds
	On/Off Switch: Yes



SSDF20

SEALED UNIT PARTS CO., INC.

PO Box 21, 2230 Landmark Place, Allenwood, NJ 08720 USA

Phone: 732-223-6644 • Fax: 732-223-1617 • www.supco.com • info@supco.com



Pocket Thermometers

Digital

PART NO.	ST09	ST10
Range	-40°F to 392°F (-40°C to 200°C)	-50°F to 392°F (-45°C to 200°C)
Accuracy	+/- 2°F (+/- 1°C) Full Scale	+/- 2°F (+/- 1°C)
Min/Max	Yes	No
°F/°C switch	Yes	Yes
Updates every second	Yes	Yes
Protective sheath	Yes	Yes
Data hold	Yes	No
On/Off switch	Yes	Yes
Pocket clip	Yes	Yes
Battery included	Yes (Supco # STBAT)	Yes (Supco # STBAT) spare included
Drop resistant	Yes	Yes
Waterproof	Yes	No
Auto off	Yes after 20 minutes	Yes
Stainless Steel Stem	Yes	Yes
Stem Length	2-1/2"	4-23/32"



ST09

Dial

Part No.	ST01	ST02	ST08
Range	-40°F to 160°F	0°F to 220°F	-40°F to 160°F (-40°C to 70°C)
Dial Size	1"	1"	1-3/4"
°F scale only	Yes	Yes	No
°F/°C scales	No	No	Yes
Recalibration Adjust	Yes	Yes	Yes
Stem length	5"	5"	5"

Applications

- Open air supermarket coolers & freezers
- Open air ice cream freezers
- Reach in coolers & freezers
- Walk in coolers & freezers
- Wine coolers
- Floral boxes
- Drying rooms
- Paint booths
- HVAC duct work
- Suction & liquid line monitoring
- Food processing
- Food preparation



ST01

Appliance Thermometers

PART NO.	ST03	ST04	ST06
Range	-20°F to 80°F (-30°C to 27°C)	100°F to 600°F (38°C to 315°C)	-40°F to 80°F (-40°C to 27°C)
Mounting	Hangs or stands	Hangs or stands	Hangs horizontal
°F/°C scales	Yes	Yes	Yes
Unbreakable lens	Yes	Yes	Yes
Applications	Refrigerators & Freezers	Ovens	Refrigerators & Freezers



ST03

SEALED UNIT PARTS CO., INC.

PO Box 21, 2230 Landmark Place, Allenwood, NJ 08720 USA
 Phone: 732-223-6644 • Fax: 732-223-1617 • www.supco.com • info@supco.com

F493 - 10052012